


Specification		BB-800	BB-900	BB-1000	
Power Rating		Australia or Europe: 220 ~ 240V~, 50/60Hz, 600 ~ 700W America or Canada: 120Vac, 60Hz, 660W			
Water inlet type	Type	Direct Inlet flow type			
	Water inlet pressure	0.4 ~ 7.5 kgf/cm ² (5.69 psi ~ 106.7psi)			
Power cord		(1.2m (4 feet): AMERICA) / (1.8m:Australia or Europe)			
Wash Device	Posterior Wash	Max. 1.2 l /min (Max. 0.32 GPM)			
	Feminine Wash	Max. 1.2 l /min (Max. 0.32 GPM)			
	Water Pressure Adjustable	5 Levels			
	Warm Water Temperature	Room Temp ~ 40°C (Room Temp. 104°F)			
	Heater	600 W			
	Safety Devices	Thermal fuse, Thermal switch, Float switch			
Heated Seat	Temperature	Room Temp ~ 41°C (Room Temp. ~ 105.8°F)			
	Heater	55 W			
	Safety Device	Thermal fuse			
Warm Air Dryer Device	Adjustable Dry Temperature (Room Temp~45°C)				
	Heater (250W)	●	●	●	
	Safety Device (Thermal fuse, bimetal)				
Turbo & Enema Function		●	●	●	
Deodorizer		-	●	●	
Remote control		-	-	●	
Inlet water temperature		3°C ~ 35°C (37.4°F ~ 95°F)			
Ambient Temperature		3°C ~ 40°C (37.4°F ~ 104°F)			
Dimension		Elongated (Control)	Round (Control)	Elongated (Remote)	Round (Remote)
	W	495mm (19.4 inch)	495mm (19.4 inch)	475mm (18.7 inch)	475mm (18.7 inch)
	L	525mm (20.6 inch)	493mm (19.4 inch)	525mm (20.6 inch)	493mm (19.4 inch)
	H	185mm (7.28 inch)	185mm (7.28 inch)	185mm (7.28 inch)	185mm (7.28 inch)
Weight (kg)		5.3kg	5.4kg	5.2kg	

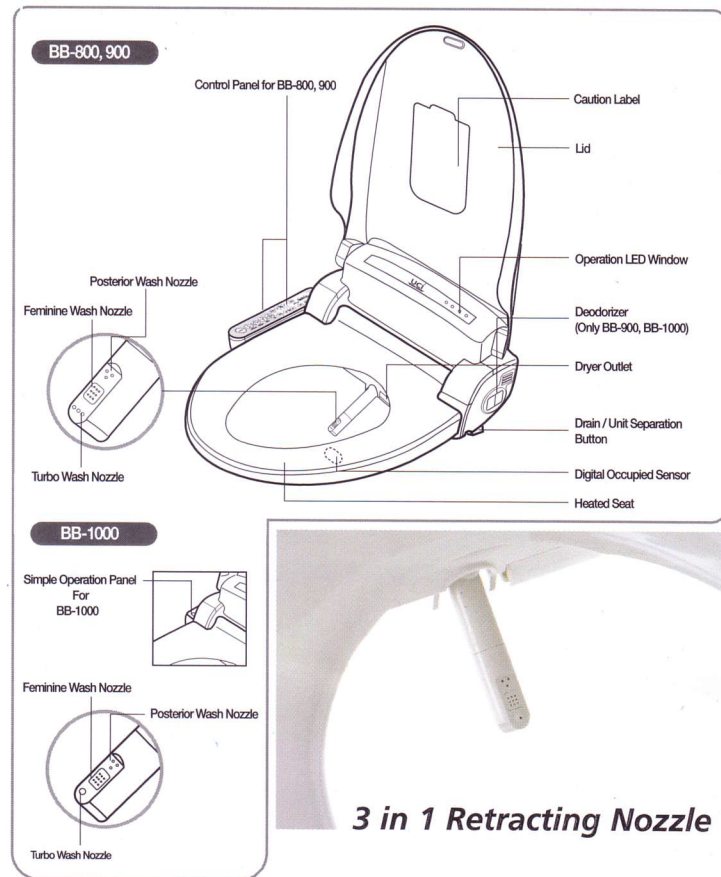

Features:

Side/Remote Control

Heated Seat

Power Saving

Hydraulic Seat

Seat Sensor

Built in Filter

3 in 1 Nozzle

Feminine Wash

Posterior Wash

Turbo Wash

Pulsating Massage

Oscillation

Self Cleaning

Air Drying

Self Diagnosis

Quick Release

Convenient panel to control and operate the various functions

Room Temp ~ 40°C

Two economy options

Gentle closing of seat and lid

Signals that the seat is occupied to commence cleaning operation

Protection against lime-scale build up

Patented nozzle for 3 cleansing programs

Soft aerated water spray for feminine cleansing

Soft yet powerful aerated water spray for thorough cleansing

Whirly mass of soft water spray to stimulate bowel movement

Pulsating and soothing flow of soft water

Oscillating movement of washing nozzle for thorough cleansing

Automatic self cleaning of washing nozzle before and after use

Powerful warm air-drying operation

System warns user of any malfunctions

Quick release mechanism to detach seat from toilet